

TECHNOLOGY OVERVIEW



Hyper-Thin-Film (HTF™) Aluminum Oxide Sensor Technology



Reliable

Accurate

Fast

- Patented technology
- High sensitivity
- Immune to temperature, electrical noise and resistant to long-term drift
- Easy maintenance

The COSA Xentaur breakthrough Hyper-Thin-Film (HTF™) Technology is based on major advances in thin-film technology and metal oxide sciences. It provides measurements with a sensitivity several orders of magnitude larger than of those made with all other technologies. HTF aluminum oxide sensors are resistant to drift and insensitive to temperature changes over most of their range.

Operating Principle

The HTF and all other aluminum oxide sensors share the same basic operating principle: the capacitance measured between the sensor's aluminum core and a gold film deposited on top of the oxide layer varies with the water vapor content in the pores of the oxide layer. Three fundamental structural improvements in the oxide layer give our HTF sensors much increased sensitivity and stability: HTF sensors have much thinner oxide layer, a better defined barrier layer between the aluminum and the aluminum oxide and a unique pore geometry enhancing the entrapment of water molecules.

Hyper-Thin Layer

With the COSA Xentaur HTF Technology, sensors can be produced with hyper-thin oxide layers without compromising insulation strength. The thinner oxide layer of HTF sensors results in much higher capacitance changes because capacitance is inversely proportional to the distance of the capacitor's plates from each other.

The thinner layer also means that water molecules will travel faster in and out of the pores. HTF aluminum oxide sensors therefore respond several times faster than conventional sensors.


Barrier Layer

In HTF sensors, the transition between the aluminum oxide and the aluminum is sharp and clearly defined. This thinner barrier layer produces a capacitor with its electrodes very close together, which in turn causes the sensor's wet to dry capacitance ratio to be high. The benefit of high wet to dry capacitance ratio is that drift in capacitance due to undesirable factors is less significant. This is clearly a benefit as can be seen in HTF vs. conventional sensor comparisons of temperature sensitivity and aging drift.

The sharp transition from aluminum to aluminum oxide also reduces metal migration, one of the major causes of aging drift in conventional sensors.



Pore Geometry

The most significant difference between HTF sensors and conventional sensors is, however, their pore geometry. While conventional sensors rely on hygroscopic aluminum oxide structures to attract water, HTF sensors rely on a pore geometry which slows the Brownian motion of the water. COSA Xentaur's HTF Technology is based on molecules when entering the pores. The freed energy is absorbed by the mass of the sensor and the decreased entropy of the water molecules is equalized by an increase in their total number. This results in more dielectric in the pores and consequently a higher capacitance. HTF sensors require no re-calibration when used in clean, non-corrosive gases.

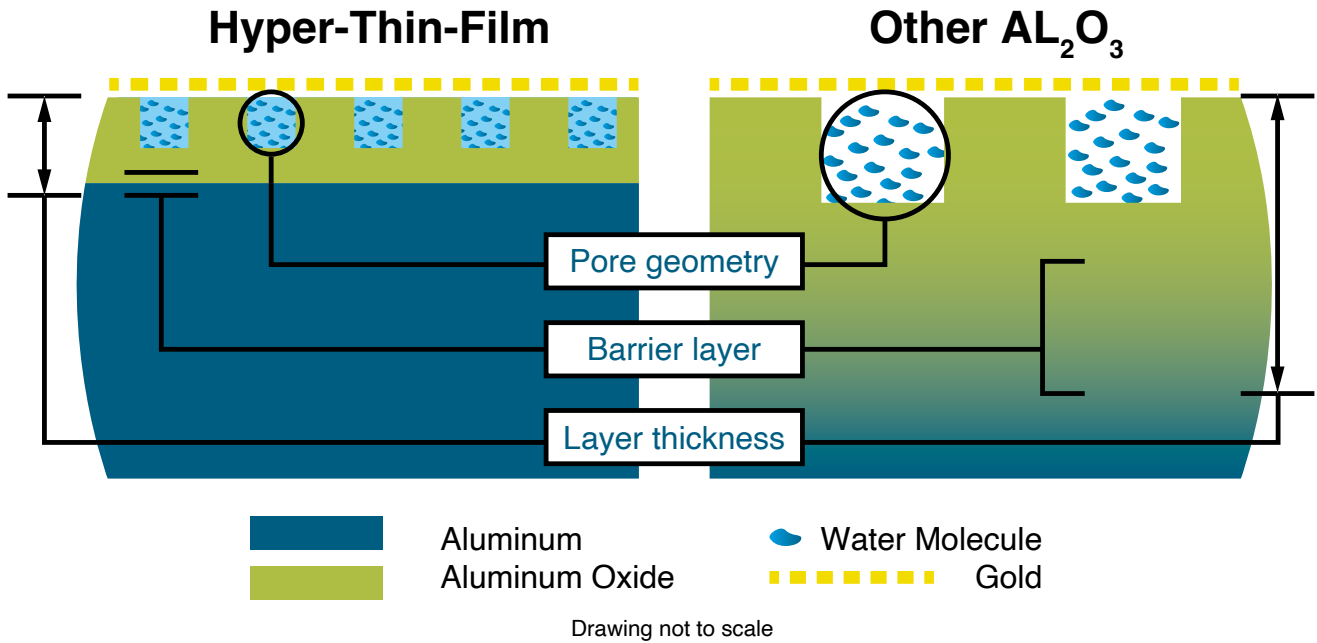



Sensitivity

The change of capacitance with moisture of COSA Xentaur HTF sensors over the full measurement range is 60 times larger than that of conventional sensors. However, because of the better linearity of HTF sensors, at the low end, capacitance changes with moisture are about 600 times larger than that of conventional sensors. The larger sensitivity of HTF sensors make it more stable and almost completely immune to other influences, such as temperature, electrical noise and even longterm drift. It puts COSA Xentaur HTF sensors in a league by themselves.

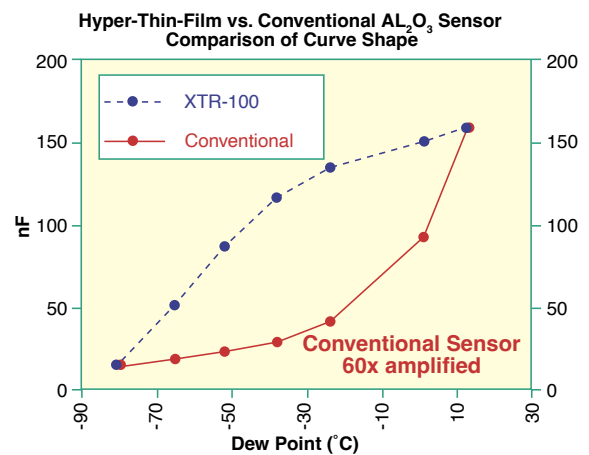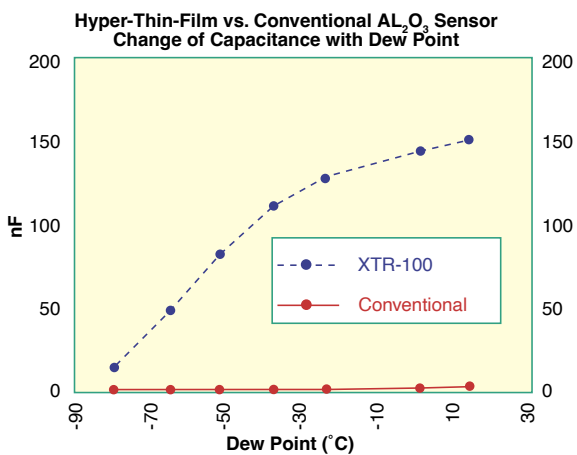


Temperature Coefficient

COSA Xentaur HTF aluminum oxide sensors are completely temperature stable over almost their full range. Only below -70°C(dp) does the measurement become slightly temperature sensitive. Temperature coefficients remain small enough though, to allow for software compensation. The temperature coefficients of conventional and ceramic sensors relative to their sensitivity are too large to allow for an accurate compensation through software.

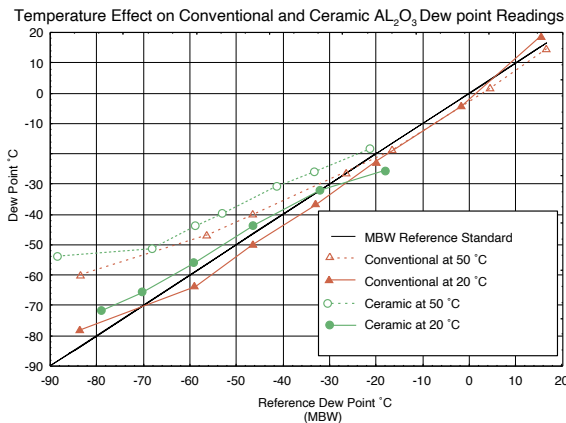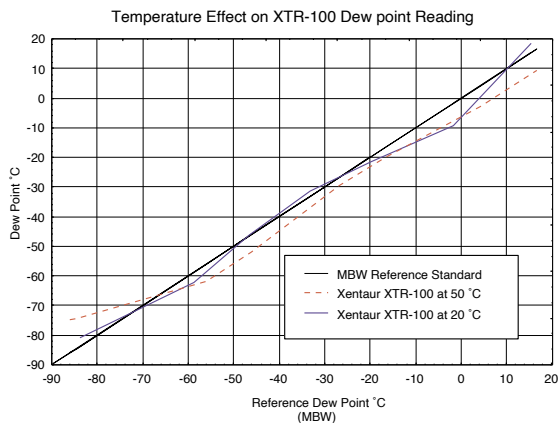


Drift

COSA Xentaur HTF sensors do not suffer from drift like conventional sensors. Their response curve remains virtually the same even after six months of operation at an elevated temperature.

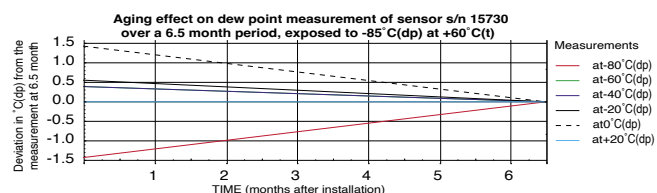


Speed

The thinner oxide layer of HTF sensors results in much faster response times.

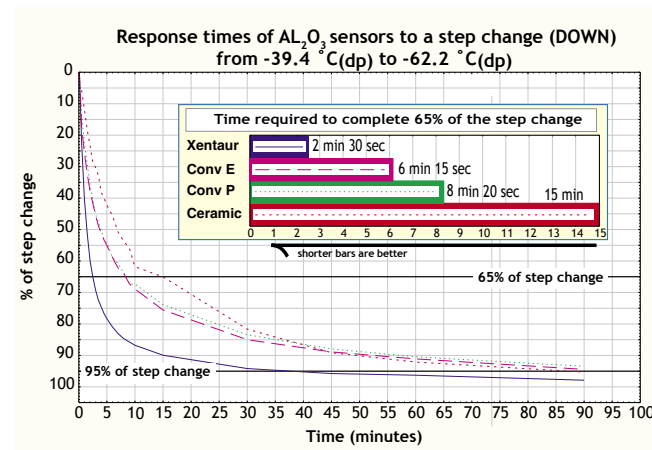

Uniformity

COSA Xentaur HTF aluminum oxide sensors can be manufactured with a high degree of uniformity. Sensors are freely exchangeable in the field with only minor adjustments required at the very extreme ends of the measurement range.

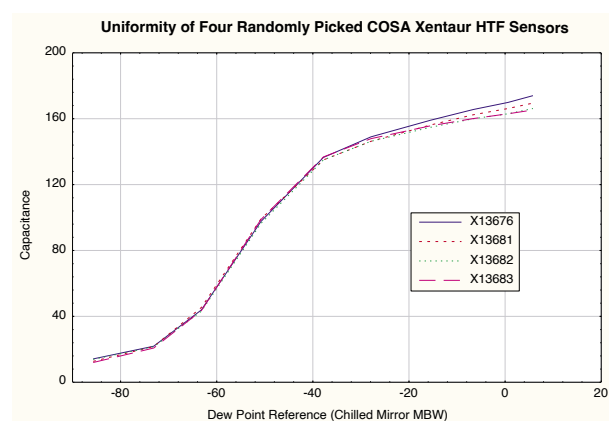

PREMIUM INSIGHTS – GAIN REAL-TIME INSIGHT INTO YOUR PROCESS

Process Insights' products and solutions deliver innovative and differentiated analysis and measurement solutions and technologies that add high value to our customers and protect the environment.

Our commitment is to deliver smart and affordable innovation that optimizes process, improves safety, and transforms our world.

CENTERS OF EXCELLENCE

PROVIDING PROVEN SOLUTIONS FROM A GLOBAL TECHNOLOGY LEADER



COSA Xentaur

4140 World Houston Parkway
Suite 180
Houston, TX 77032
USA
+1 713 947 9591
www.cosaxentaur.com
sales@cosaxentaur.com

Process Insights – The Americas

4140 World Houston Parkway
Suite 180
Houston, TX 77032
USA
+1 713 947 9591
info@process-insights.com

Process Insights – EMEA

ATRICOM
Lyoner Strasse 15
60528 Frankfurt
Germany
+49 69 20436910
info@emea.process-insights.com

Process Insights – APAC

Wujiang Economic and Technology
Development Zone
No. 258 Yi He Road, 215200 Suzhou
Jiangsu Province China
+86 400 086 0106
info@apac.process-insights.com

OUR PREMIUM GLOBAL BRANDS

