

**PRODUCT DATASHEET**

# MAX300-LG™

Laboratory Gas Analyzer



**Fast Response**

---

**Process Control**

---

**Stable  
Measurement**

- Real-Time Gas Analysis
- Catalysis Monitoring
- Trace Gas Detection
- Environmental Research
- Multi-point Process Control

## SPECIFICATIONS

<b>System Highlights:</b>	
<b>Detectable compounds</b>	Any gas or vapor sample
<b>Detection range</b>	<ul style="list-style-type: none"> <li>- Faraday detector: 100% – 5 ppm</li> <li>- Electron multiplier: 100% – 5 ppb*</li> <li>- Membrane inlet: 100% – 10 ppt*</li> </ul>
<b>Analysis rate</b>	0.005 – 16 seconds per component - User selectable
<b>Number of components</b>	Unlimited
<b>Number of analysis routines</b>	Unlimited
<b>Number of user configurable data tags</b>	Unlimited
<b>Precision</b>	<0.05% RSD over 24 hours**
<b>Stability</b>	<0.5% RSD over 30 days**
<b>Ionization energy control for reduced fragmentation</b>	
<b>Automated detector switching within a single scan</b>	
<b>Filaments</b>	Two, one active and one spare with automatic switchover
<b>Analyzer maintenance</b>	1-3 years†
<b>Roughing pump</b>	6-12 months†
<b>Manual or fully automated calibration and validation</b>	3-12 month calibration intervals
<b>Mass range options</b>	1-250, 300, 500 amu
<b>19 mm High-transmission quadrupole filter</b>	

\* Matrix dependent. Documented on trace air components and benzene.

\*\* Based on the analysis of 1% argon, scan speed 1 second per analysis with no recalibration or intervention of any kind.

† Application dependent.

## MAX300-LG System Specifications

### Power Supply Options:

- 110 vAC +/- 10% vAC 50/60 hz, 10 Amp Circuit
- 230 vAC +/- 10% vAC 50/60 hz, 10 Amp Circuit

### Power Consumption:

- Nominal 700 Watts

### Weight:

- Approximately 165 lbs (75 kg)
- Optional cart: 40 lbs (18 kg)

### Ambient Requirements:


- 55°F to 80°F (13°C to 27°C)
- Area Classification: General Purpose

### Relative Humidity:


- 0-90% non-condensing

### Data System and Communications:

- System control interface options: Ethernet or USB
- Login security levels: Administrator, User, Viewer
- External communications: Ethernet, Modbus serial, digital I/O, analog I/O, OPC

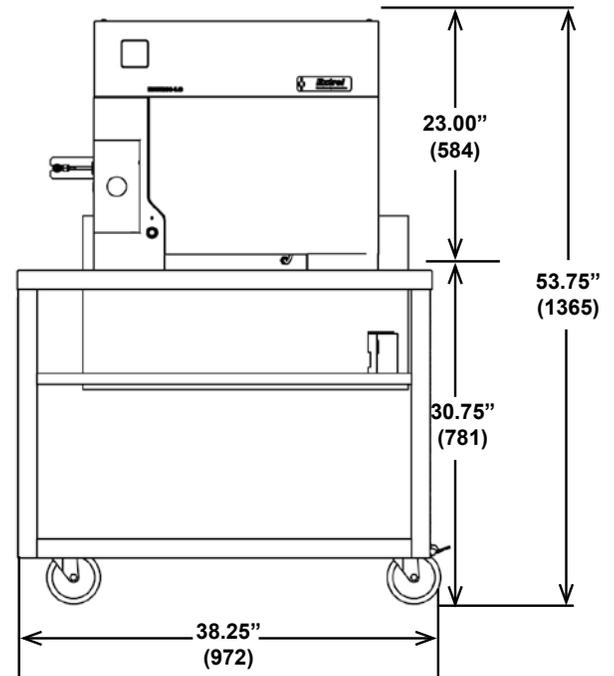

MAX300-LG enclosure with cart

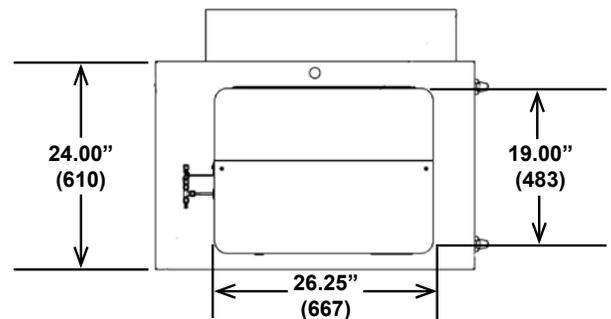

MAX300-LG enclosure with cart top view.

Dimensions shown in inches [cm]

---

## Exceptional Worldwide Service and Support

For over 55 years, we have been committed to providing the highest quality support services for thousands of instruments installed worldwide. Factory trained and certified personnel offer industry-leading support to our customers at every stage of their analytical process.

## GAIN REAL-TIME INSIGHT INTO YOUR PROCESS

Process Insights delivers premium analytical sensors, analyzers, instrumentation, software and solutions that are mission-critical to keep your operations, personnel, and the environment safe. Our commitment to customer satisfaction is evident through our diverse range of products, programs, and services, designed to accommodate various budgets and application needs.

---

## CENTERS OF EXCELLENCE

### Process Insights – The Americas

14400 Hollister Street, Suite 800-B, Houston, TX 77066, USA

☎ +1 713 947 9591

[info.americas@process-insights.com](mailto:info.americas@process-insights.com)

### Process Insights – EMEAI

ATRICOM, Lyonerstrasse 15, 60528 Frankfurt, Germany

☎ +49 69 20436910

[info.emeai@process-insights.com](mailto:info.emeai@process-insights.com)

### Process Insights – CHINA

Wujiang Economic and Technology, Development Zone No. 258 Yi He Road  
215200 Suzhou, Jiangsu Province, China

☎ +86 400 086 01

[info.cn@process-insights.com](mailto:info.cn@process-insights.com)

### Process Insights – APAC

Premier@Kaki Bukit, 10 Kaki Bukit Ave 4, Blk 10 #05-65, Singapore 415874

☎ +65 6489 6612

[info.apac@process-insights.com](mailto:info.apac@process-insights.com)

