


PRODUCT DATASHEET

SERIES 2500 & 2510™

Percent Oxygen Transmitter



Product shown with optional flow meter, needle valve and coalescing filter

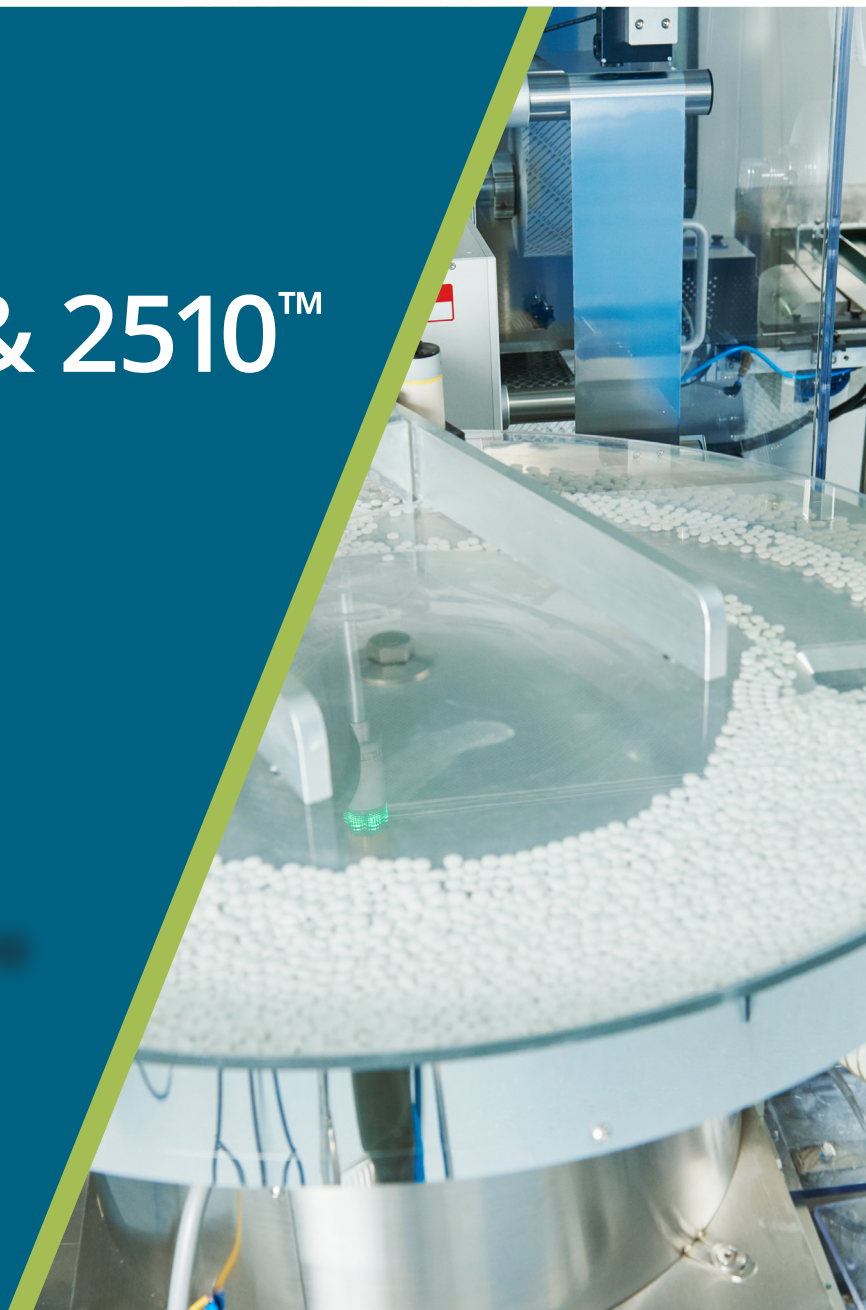

FEATURES	BENEFITS
Wide Number of Ranges	Measure from <0.1% to 100% Oxygen
Exceptional Speed of Response	Responds Instantaneously to Changes in Oxygen
Rugged and Versatile Construction	NEMA 4 Housing Withstands Harsh Environments
Economically Priced	Save Thousands of Dollars vs Other Methods
Extended Life Sensor	Eliminates Frequent Sensor Replacement
Acid Gas Resistant Sensor	Eliminates Sample Conditioning for Many Applications
Factory Calibration	Factory calibration and certificate included at no additional charge

Product Description

The Series 2500™ Percent Oxygen Transmitter is a true loop powered (14-32 VDC) percent oxygen transmitter designed to provide accurate and dependable percent oxygen measurements in a variety of background gases. Measurement ranges available are from 0-2% to 0-100%. The Series 2500 enclosure is made from durable polycarbonate, and is rated for NEMA 4 (IP 66) service (may change with the addition of certain optional equipment). A 4-20 mA DC output is provided that can be used with a data logger, recorder, PLC, DCS, etc. Options include pressure regulators, flow meters, sample filters and sample pumps.

The Series 2510 Percent Oxygen Transmitter is the AC powered (115 VAC, 50-60 Hz) or 24VDC counterpart to the Series 2500 and is recommended when AC power is available or preferred.

The Series 2500 and Series 2510 Percent Oxygen Transmitters feature an extended life oxygen sensor with EES (enhanced electrolyte system). This sensor provides exceptional performance, accuracy, and stability. For applications where carbon dioxide is present in the sample gas, the EES retards passivation of the sensor anode by allowing the products of oxidation to dissolve in the electrolyte. In effect, the sensor is renewed continuously, resulting in an increase in sensor life even if exposed to 100% carbon dioxide. In addition, the enhanced mechanical design of the sensor ensures longer life, and virtually eliminates leakage of electrolyte, a nagging (and expensive) problem associated with sensors that require periodic electrolyte maintenance.

SPECIFICATIONS

Performance

Measurement Ranges

in Percent:

0-2/100

0-5/100

0-10/100

0-25/100

0-100/10

Switchable Range (Calibrated on the first range)

Accuracy¹:

±1% of full scale (± 5% of full scale on ranges ≤ 0-5%)

Linearity:

±1% of full scale

Response Time:

90% of full scale response in less than 20 seconds (typical)

Sensor Type:

Long-life electrochemical sensor

Temperature Compensation:

Standard

Operating

Temperature Range:

40° to 104° F (5° to 40°C)

Warranty:

2 years electronics/1 year sensor

Electrical

**Series 2500 Loop
Powered Percent
Oxygen Transmitter:**

Input power 14-32 VDC

**Series 2510 Percent
Oxygen Transmitter
Input Power:**

Input power 115 or 230 VAC, 50-60 Hz, or 24 VDC

Analog Output:

4-20mADC with a loop resistance of 600 ohms@ 24VDC
(consult factory for other resistance values)

Sample Gas Characteristics

Sample Flow Rate: 1.0 to 2.0 SCFH (0.5 to 1.0 liter/min)

**Sample Gas
Temperature:** 40° to 104°F (5° to 40°C)

Sample Gas Pressure: 0.1 to 1.5 psig (0.007 to 0.1 kg/cm²)

Construction

Enclosure: Polycarbonate, rated NEMA 4X (IP66) without optional equipment.

Dimensions*: 6.5 in. (165.1 mm) height
7.0 in. (177.8 mm) width
3.9 in.(99.06 mm) depth

Gas Connections: Quick connect 1/4" OD for plastic tubing or stainless steel compression fittings for installations with metal sample lines

¹ Stated at constant temperature and constant pressure.

* Note: All dimensions are without optional equipment

GAIN REAL-TIME INSIGHT INTO YOUR PROCESS

Process Insights delivers premium analytical sensors, analyzers, instrumentation, software and solutions that are mission-critical to keep your operations, personnel, and the environment safe. Our commitment to customer satisfaction is evident through our diverse range of products, programs, and services, designed to accommodate various budgets and application needs.

CENTERS OF EXCELLENCE | PROVIDING PROVEN SOLUTIONS

Process Insights – The Americas

14400 Hollister Street, Suite 800B, Houston, TX 77066, USA +1 713 947 9591

Process Insights – EMEA

ATRICOM, Lyoner Strasse 15, 60528 Frankfurt, Germany +49 69 20436910

Process Insights – APAC

Wujiang Economic and Technology, Development Zone, No. 258 Yi He Road, 215200 Suzhou, Jiangsu Province, China +86 400 086 0106

For a complete range of products, applications, systems, and service options, please contact us at: info@process-insights.com

For a complete list of sales & manufacturing sites, please visit: <https://www.process-insights.com/about-us/locations/>

